


VT 片式铝电解电容
SMD Aluminum Electrolytic Capacitors

- 产品直径。Case diameter: Φ4mm-Φ10mm.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。Available for high density surface mounting.
- 工作温度范围宽 (-40~+105°C)。Operating over wide temperature range (-40~+105°C)
- RoHS 指令已对应完毕。Adapted to the RoHS directive.

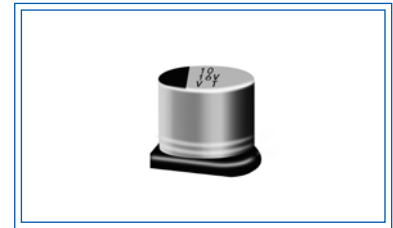


Surface Mount

主要技术性能 Specifications

项目 Item	特性 Performance Characteristics							
工作温度范围 Operating Temperature Range	-40°C ~ +105°C							
额定电压范围 Rated Voltage Range	4~50V							
标称容量范围 Nominal Capacitance Range	0.1~1000μF							
标称容量允许偏差 Capacitance Tolerance	±20%(+20°C, 120Hz)							
漏电流 Leakage Current	I ≤ 0.01C _R U _R or 3(μA), 取较大者 (2 分钟) Whichever is greater (at 20°C , after 2 minutes) C _R : 标称容量 Nominal capacitance(μF), U _R : 额定电压 Rated voltage(V)							
损耗角正切值 (tgδ) Dissipation Factor (Max) (+20°C ,120Hz)	U _R (V)	4	6.3	10	16	25	35	50
	tgδ	0.35	0.28	0.24	0.20	0.16	0.14	0.12
耐久性 Load Life	+105°C施加额定电压 1000 小时后，电容器应满足以下要求： After 1000 hours' application of rated voltage at 105°C, the capacitor shall meet the following requirement:							
	电容量变化率 Capacitance change	±20% 初始测量值以内 (≤ 16V: ±25% 初始测量值以内) Within ±20% of the initial value(≤ 16V: within ±25% of the initial value)						
	损耗角正切 Dissipation factor	≤ 300% 初始规定值 Not more than 300% of the initial specified value						
高温贮存 Shelf Life	+105°C 贮存 1000 小时后，电容器应满足以上耐久性要求 After storage for 1000 hours at 105°C, the capacitors shall meet the requirement of load life above.							
	低温特性 Low Temperature Stability 阻抗比 Impedance Ratio(120Hz)	U _R (V)	4	6.3	10	16	25	35
耐焊接热 Resistance to Soldering Heat	Z-25°C /+20°C	7	4	3	2	2	2	2
	Z-40°C /+20°C	15	8	6	4	4	3	3
	在 250°C的条件下，电容器在热板上保持 30 秒，然后从热板上取出电容器，让其在室温下恢复，电容器应满足以下要求： The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement:							
电容量变化率 Capacitance change	±10% 初始测量值以内 Within ±10% of the initial value							
	损耗角正切 Dissipation factor	≤ 初始规定值 Not more than the initial specified value						
	漏电流 Leakage current	≤ 初始规定值 Not more than the initial specified value						

外形图及尺寸 Diagram of Dimensions

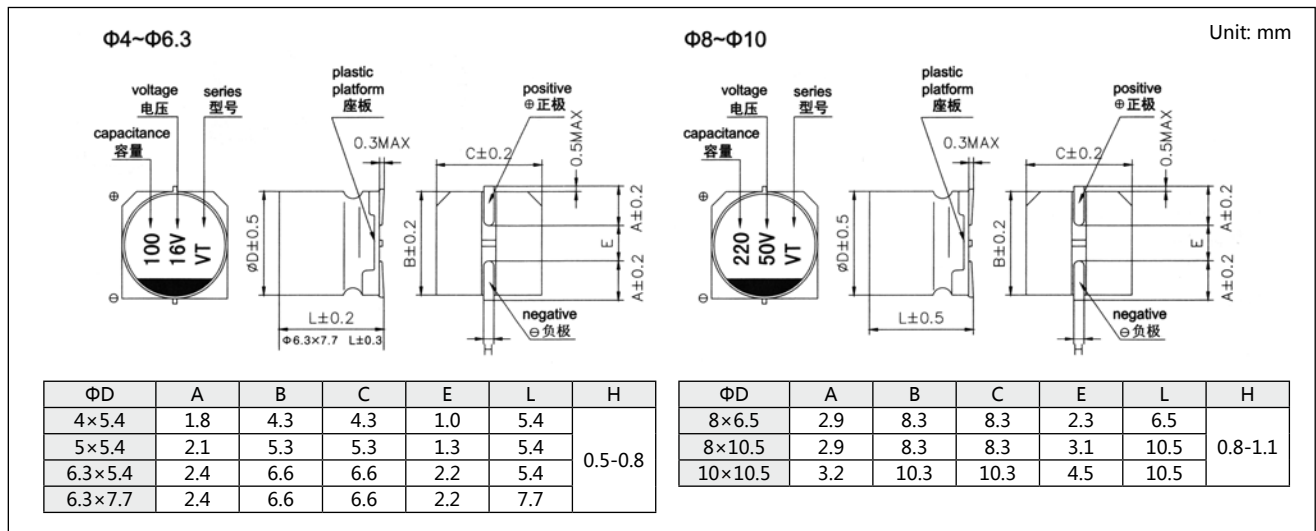

标称电容量、额定电压、额定纹波电流与外形尺寸对应表
Nominal capacitance, rated voltage, rated ripple current and case size table

V Item Cap.(μF)	4		6.3		10		16		25		35		50	
	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)
0.1													4×5.4	2.3
0.22													4×5.4	3.4
0.33													4×5.4	4.1
0.47													4×5.4	5
1.0													4×5.4	10
2.2													4×5.4	16
3.3											4×5.4	13	4×5.4	16
4.7									4×5.4	22	4×5.4	22	5×5.4	23
10							4×5.4	28	5×5.4	28	5×5.4	30	6.3×5.4	32
22			4×5.4	29	5×5.4	30	5×5.4	39	6.3×5.4	55	6.3×5.4	38	6.3×7.7	51
33	4×5.4	29	5×5.4	34	5×5.4	34	5×5.4	35	6.3×5.4	65	6.3×5.4	42	6.3×7.7	70
47	4×5.4	30	5×5.4	46	6.3×5.4	48	6.3×5.4	70	6.3×5.4	70	6.3×7.7	80	6.3×7.7	80
100	5×5.4	47	6.3×5.4	71	6.3×5.4	69	6.3×5.4	70	6.3×7.7	100	8×10.5	296	8×10.5	230
220	6.3×5.4	71	6.3×7.7	120	6.3×7.7	120	6.3×7.7	120	8×10.5	320	10×10.5	435	10×10.5	375
330	6.3×7.7	105	6.3×7.7	290	8×10.5	305	8×10.5	425	10×10.5	450	10×10.5	450		
470	6.3×7.7	105	8×10.5	330	8×10.5	340	8×10.5	340	10×10.5	490				
1000	8×10.5	260	10×10.5	475	10×10.5	410								

I~ = 额定纹波电流 Rated ripple current (mA)(+105° C, 120Hz)

额定纹波电流的频率系数 Frequency coefficient of ripple current

Frequency 频率	50Hz	120Hz	300Hz	1kHz	10K~100KHz
Coefficient 系数	0.70	1.00	1.17	1.36	1.50