


VN 片式铝电解电容
SMD Aluminum Electrolytic Capacitors

- 双极性。Bi-polarized.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。Available for high density surface mounting.
- RoHS 指令已对应完毕。Adapted to the RoHS directive.

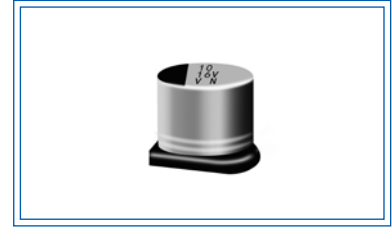


Surface Mount

主要技术性能 Specifications

项目 Item	特性 Performance Characteristics						
工作温度范围 Operating Temperature Range	-40°C ~ +85°C						
额定电压范围 Rated Voltage Range	6.3~50V						
标称容量范围 Nominal Capacitance Range	0.1~100μF						
标称容量允许偏差 Capacitance Tolerance	±20%(+20°C, 120Hz)						
漏电流 Leakage Current	I ≤ 0.05C _R U _R or 10(μA), 取较大者 (2 分钟) Whichever is greater (at 20°C , after 2 minutes) C _R : 标称容量 Nominal capacitance(μF), U _R : 额定电压 Rated voltage(V)						
损耗角正切值 (tgδ) Dissipation Factor (Max) (+20°C ,120Hz)	U _R (V)	6.3	10	16	25	35	50
	tgδ	0.26	0.22	0.20	0.20	0.20	0.18
耐久性 Load Life	+85°C施加额定电压 1000 小时后，每 250 小时换向一次，电容器应满足以下要求： After 1000 hours' application of rated voltage at 85°C , with the polarity inverted every 250 hours, the capacitor shall meet the following requirement:						
	容量变化率 Capacitance change	±20% 初始测量值以内 Within ±20% of the initial value					
	损耗角正切 Dissipation factor	≤ 200% 初始规定值 Not more than 200% of the initial specified value					
高温贮存 Shelf Life	+85°C 贮存 1000 小时后，电容器应满足以上耐久性要求。 After storage for 1000 hours at 85°C ,the capacitors shall meet the requirement of load life above.						
	低温特性 Low Temperature Stability 阻抗比 Impedance Ratio(120Hz)	U _R (V)	6.3	10	16	25	35
耐焊接热 Resistance to Soldering Heat	Z-25°C /+20°C	4	3	2	2	2	2
	Z-40°C /+20°C	8	6	4	4	3	3
	在 250°C的条件下，电容器在热板上保持 30 秒，然后从热板上取出电容器，让其在室温下恢复，电容器应满足以下要求： The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement:						
耐焊接热 Resistance to Soldering Heat	容量变化率 Capacitance change	±10% 初始测量值以内 Within ±10% of the initial value					
	损耗角正切 Dissipation factor	≤ 初始规定值 Not more than the initial specified value					
	漏电流 Leakage current	≤ 初始规定值 Not more than the initial specified value					

外形图及尺寸 *Diagram of Dimensions*

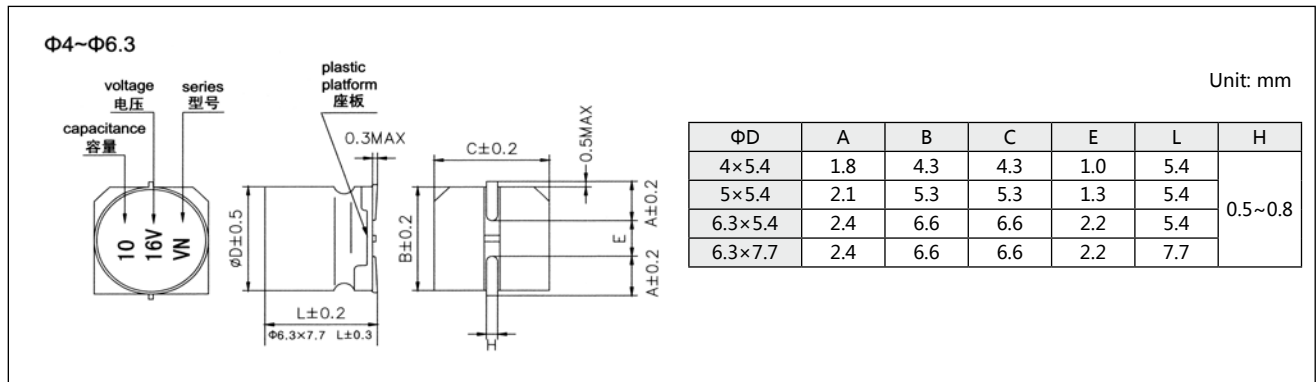

Surface Mount

标称电容量、额定电压、额定纹波电流与外形尺寸对应表
Nominal capacitance, rated voltage, rated ripple current and case size table

V Item Cap.(μF)	6.3		10		16		25		35		50	
	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)	ΦD×L (mm)	I~ (mA)
0.1											4×5.4	2.3
0.22											4×5.4	3.3
0.33											4×5.4	4.1
0.47											4×5.4	4.9
1.0											4×5.4	8.4
2.2									4×5.4	10	5×5.4	13
3.3							4×5.4	13	5×5.4	17	5×5.4	17
4.7					4×5.4	14	5×5.4	20	5×5.4	21	6.3×5.4	20
10			4×5.4	18	5×5.4	26	6.3×5.4	35	6.3×5.4	35	6.3×7.7	36
22	5×5.4	28	6.3×5.4	40	6.3×5.4	45	6.3×7.7	50	6.3×7.7	54		
33	6.3×5.4	37	6.3×5.4	50	6.3×5.4	55	6.3×7.7	61				
47	6.3×5.4	45	6.3×7.7	61	6.3×7.7	75						
100	6.3×7.7	82										

I~ = 额定纹波电流 Rated ripple current (mA) (85° C ,100KHz)

额定纹波电流的频率系数 *Frequency coefficient of ripple current*

Frequency 频率	50Hz	120Hz	300Hz	1kHz	≥ 10KHz
Coefficient 系数	0.70	1.00	1.17	1.36	1.50